

# ATTACHMENTS COLLECTION

---



**Quality, craftsmanship and innovation.  
The secret lies in precision. Having clear ideas is vital:  
we need to know where we want to go and what we want to create.  
And at Magni, we throw our all into accomplishing it.**

**Riccardo Magni – President**

---

Magni Telescopic Handlers was founded in 2013. Thus began the development of the widest range of telescopic handlers on the market; from rotating telescopic handlers to fixed, heavy-duty models and fixed-boom construction telescopic handlers. Italy was no longer enough and so six further branches have been set up: Magni TH France, Magni UK, Magni America, Magni Deutschland, Magni SA and Magni Asia Pacific. To offer our clients the best technical and commercial service around, we have created a network of over 300 dealers, a number that is constantly increasing. And that is just the beginning of our story.

---

# FORK CARRIAGES

Wide range to meet market needs and to assist our operators directly in the workplace. From the simplest fork carriers to those with heavy-duty capacities and larger fork sizes to be able to perform aggravating work in the most extreme conditions.

**Warning:**

Compatibility depends also on the max capacity of the unit. please check max allowed weight. if in doubt, ask.



## STANDARD FORK CARRIAGE 11,020 LBS

ATT - 03 - 001 Q-FIT I

Floating fork carriage with 11,020 lbs capacity.



**Suitable for  
RTH**

**FC5T**

|            |        |                         |   |   |
|------------|--------|-------------------------|---|---|
|            |        |                         |   |   |
| 11,020 lbs | 3' 11" | 10" (min) - 4' 3" (max) | ✗ | ✓ |



## FEM FORK CARRIAGE 11,020 LBS

ATT - 03 - 003 Q-FIT I

Fork carriage with fork attachment plate, 11,020 lbs capacity, 4' 3" width



**Suitable for  
RTH  
NO ANSI**

**FCF5T 1,3**

|            |        |                         |   |   |   |
|------------|--------|-------------------------|---|---|---|
|            |        |                         |   |   |   |
| 11,020 lbs | 3' 11" | 10" (min) - 4' 3" (max) | ✗ | ✗ | ✓ |









## FEM FORK CARRIAGE 11,020 LBS (WITH SIDESHIFT)

ATT - 03 - 044 **Q-FIT I**

Fork carriage with fork attachment plate,  
11,020 lbs capacity, 3' 11" mm width

**Suitable for**  
**TH**

### FCTF 5T

|   |   |   |  |   |   |
|---|---|---|--|---|---|
|  |  |  |  |  |  |
| 11,020 lbs  | 3' 11"  | 10" (min) - 3' 11" (max)  | ×  | 4"  | ✓   |







## STANDARD FORK CARRIAGE 11,020 LBS

ATT - 03 - 039 **Q-FIT I**

Floating forks with 11,020 lbs capacity.

**Suitable for**  
**TH**

### FC5T FIX

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 11,020 lbs  | 3' 11"  | 2' 1" (min) - 3' 5" (max)   | ×   | ✓   |



## STANDARD FORK CARRIAGE 12,125 LBS

ATT - 03 - 040 Q-FIT I

Floating forks with 12,125 lbs capacity.

**Suitable for**  
TH

### FCST FIX

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 12,125 lbs  | 3' 11"  | 1' 10" (min) - 3' 5" (max)  | ✗   | ✓   |









## FEM FORK CARRIAGE 12,125 LBS (WITH SIDESHIFT)

ATT - 03 - 045 Q-FIT I

Fork carriage with fork attachment plate, 12,125 lbs capacity, 1,200 mm width

**Suitable for**  
TH

### FCTF 5T C100-R

|   |   |   |  |   |   |
|---|---|---|--|---|---|
|  |  |  |  |  |  |
| 12,125 lbs  | 1,200 mm  | 1' 4" (min) - 3' 11" (max)  | ✗  | 4"  | ✓   |



## STANDARD FORK CARRIAGE 13,230 LBS

ATT - 03 - 006 Q-FIT I

Floating fork carriage with 13,230 lbs capacity.



**Suitable for  
RTH**

FC6T

|            |        |                            |   |   |
|------------|--------|----------------------------|---|---|
|            |        |                            |   |   |
| 13,230 lbs | 3' 11" | 1' 10" (min) - 3' 5" (max) | ✗ | ✓ |



## STANDARD FORK CARRIAGE 13,230 LBS

ATT - 03 - 008 Q-FIT I

Floating fork carriage with 13,230 lbs capacity, dedicated for model RTH 6.46.



**Suitable for  
RTH 6.46**

FC6T

|            |        |                            |   |   |
|------------|--------|----------------------------|---|---|
|            |        |                            |   |   |
| 13,230 lbs | 3' 11" | 1' 10" (min) - 3' 5" (max) | ✗ | ✓ |



## FORK CARRIAGE 13,230 LBS

ATT - 03 - 009 Q-FIT I

Floating fork carriage with 13,230 lbs capacity, increased width of 6' and minimum closure 2' 5".



**Suitable for  
RTH**

### FC6T 6x5 FT

|            |       |                        |   |   |   |
|------------|-------|------------------------|---|---|---|
|            |       |                        |   |   |   |
| 13,230 lbs | 5' 1" | 2' 5" (min) - 6' (max) | × | × | ✓ |



## STANDARD FORK CARRIAGE 13,230 LBS

ATT - 03 - 012 Q-FIT I

Floating forks with 13,230 lbs capacity.



**Suitable for  
TH**

### FC6T FIX

|            |        |                          |   |   |
|------------|--------|--------------------------|---|---|
|            |        |                          |   |   |
| 13,230 lbs | 3' 11" | 2' 3"(min) - 3' 5" (max) | × | ✓ |





## FEM FORK CARRIAGE 13,230 LBS

ATT - 03 - 010 Q-FIT I

Forks with fork attachment plate, 13,230 lbs capacity, 4' 3" width and 3' 11" fork length.



**Suitable for  
RTH - TH**

### FCF6T 1,3

|            |        |                         |   |   |   |
|------------|--------|-------------------------|---|---|---|
|            |        |                         |   |   |   |
| 13,230 lbs | 3' 11" | 11" (min) - 4' 3" (max) | ✗ | ✗ | ✓ |





## FEM FORK CARRIAGE 13,230 LBS (WITH SIDESHIFT)

ATT - 03 - 046 Q-FIT I

Fork carriage with fork attachment plate, 13,230 lbs capacity, 3' 11" mm width.



Suitable for  
TH

FCFT 6 T C100-R

|            |        |                            |   |     |   |
|------------|--------|----------------------------|---|-----|---|
|            |        |                            |   |     |   |
| 13,230 lbs | 3' 11" | 1' 3" (min) - 3' 11" (max) | × | 14" | ✓ |



## WIDE FORK CARRIAGE 13,230 LBS

ATT - 03 - 014 Q-FIT I

Floating forks with 13,230 lbs capacity, dedicated for the TH range.



Suitable for  
RTH - TH

FC6T 72x72 FIX

|            |    |                        |   |   |
|------------|----|------------------------|---|---|
|            |    |                        |   |   |
| 13,230 lbs | 6' | 2' 3" (min) - 6' (max) | × | ✓ |



## STANDARD FORK CARRIAGE 17,640 LBS

ATT - 03 - 015 Q-FIT I

Floating forks with 17,640 lbs capacity.

**Suitable for  
RTH**

FC8T

|   |   |   |  |   |   |
|---|---|---|--|---|---|
|  |  |  |  |  |  |
| 17,640 lbs  | 3' 11"  | 1' 10" (min) - 3' 5" (max)  | ×  | ×   | ✓   |








## WIDE FORK CARRIAGE 17,640 LBS

ATT - 03 - 017 Q-FIT I

Floating fork carriage with 17,640 lbs capacity, fork width 1,840 and fork length 1,830 mm.

**Suitable for  
RTH**

FC8T 72x72

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 17,640 lbs  | 6'  | 1' 10" (min) - 6' (max)   | ×   | ✓   |



## GRID FOR LOAD PROTECTION FOR FEM FORK CARRIAGE

*ATT - 03 - 005*

Upper support and protection grille for FEM and floating fork carriage.



**Suitable for  
RTH - TH**

**PCF**



3' 8" x 2'



## GRID FOR LOAD PROTECTION FOR FLOATING FORK CARRIAGE

*ATT - 03 - 038*

Upper support and protection grille for fork carriage.



**Suitable for  
RTH - TH**

**PC**



3' 6" x 1' 2"





## FORK CARRIAGE 22,050 LBS

ATT - 03 - 018 Q-FIT I

Floating fork carriage with capacity up to 22,050 lbs, with load protection grid.



**Suitable for**  
HTH 10.10

F10T

|            |        |           |           |   |
|------------|--------|-----------|-----------|---|
|            |        |           |           |   |
| 22,050 lbs | 4' 11" | min 2' 8" | max 5' 9" | ✓ |



## FORK CARRIAGE 22,050 LBS (WITH FORK POSITIONER)

ATT - 03 - 019 Q-FIT I

Floating fork carriage with capacity up to 22,050 lbs, with hydraulic movement of the individual forks possible.



**Suitable for**  
HTH 10.10

FCP10T

|            |        |           |           |   |
|------------|--------|-----------|-----------|---|
|            |        |           |           |   |
| 22,050 lbs | 4' 11" | min 2' 8" | max 5' 8" | ✓ |



## FORK CARRIAGE 22,050 LBS (WITH FORK POSITIONER)

ATT - 03 - 020 Q-FIT I

Fork carriage with capacity up to 22,050 lbs, with hydraulic movement of the individual forks possible. Equipped with 8' 2" long, 7' 6" wide forks. Load protection grid included.



**Suitable for  
HTH 10.10**

### FCP10T 2,5 C

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 22,050 lbs  | 8' 2"   | min 2' 8"   | max 7' 6"   | ✓   |



## FORK CARRIAGE 28,660 LBS (WITH FORK POSITIONER)

ATT - 03 - 021 Q-FIT I

Floating fork carriage with capacity up to 28,660 lbs.



**Suitable for  
RTH**

### FCP13T

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 28,660 lbs  | 4' 11"  | min 2' 9"   | max 5' 10"  | ✓   |



## FORK CARRIAGE 35,270 LBS

ATT - 03 - 022 Q-FIT I

Floating fork carriage with capacity up to 35,270 lbs.

**Suitable for  
HTH**

| F16T       |        |       |       |   |
|------------|--------|-------|-------|---|
|            |        |       |       |   |
| 35,270 lbs | 4' 11" | 3' 8" | 6' 6" | ✓ |



## FORK CARRIAGE 35,270 LBS (WITH FORK POSITIONER)

ATT - 03 - 023 Q-FIT I

Floating fork carriage with capacity up to 35,270 lbs, with hydraulic movement of the individual forks possible. Load protection grid included.



**Suitable for  
HTH**

| FCP16T     |        |       |       |   |
|------------|--------|-------|-------|---|
|            |        |       |       |   |
| 35,270 lbs | 4' 11" | 3' 9" | 6' 6" | ✓ |









## FORK CARRIAGE 35,270 LBS (WITH FORK POSITIONER AND SIDE SHIFT)

ATT - 03 - 024 Q-FIT I

Floating fork carriage with capacity up to 35,270 lbs, with hydraulic movement of the individual forks and combined side shift possible. Load protection grid included.

**Suitable for  
HTH**

FCPT16 2,4

|   |   |   |  |            |   |
|---|---|---|--|------------|---|
|  |  |  |  | SIDE SHIFT |  |
| 35,270 lbs  | 7' 10"  | min 1' 10"  | max 6' 6"  | +/- 11"    | ✓   |



## FORK CARRIAGE 35,270 LBS (WITH FORK POSITIONER)

ATT - 03 - 025 Q-FIT I

Floating ork carriage with 7' 6" width and capacity up to 35,270 lbs, with hydraulic movement of the individual forks possible. Load protection grid included.

**Suitable for  
HTH**

FCP16T C

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 35,270 lbs  | 7' 10"  | 4' 1"   | 7' 6"   | ✓   |



## FORK CARRIAGE 44,100 LBS (WITH FORK POSITIONER)

ATT - 03 - 026 Q-FIT I

Floating fork carriage with capacity up to 44,100 lbs, with hydraulic movement of the individual forks possible. Load protection grid included.



**Suitable for  
HTH**

### FCP20T

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 44,100 lbs  | 4' 11"  | 3' 9"   | 6' 6"   | ✓   |



## FORK CARRIAGE 52,900 LBS (WITH FORK POSITIONER)

ATT - 03 - 027 Q-FIT I

Floating fork carriage with capacity up to 24,000 kg, with hydraulic movement of the individual forks possible. Load protection grid included.



**Suitable for  
HTH**

### FCP24T

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| 52,900 lbs  | 5' 10"  | 4' 1"   | 6' 6"   | ✓   |



## FORK CARRIAGE 52,900 LBS (WITH FORK POSITIONER)

*ATT - 03 - 028 Q-FIT I*

Floating fork carriage with capacity up to 52,900 lbs. Fork width 7' 7", fork length 7' 10". Hydraulic movement of the individual forks possible. Load protection grid included.



**Suitable for  
HTH**

### FCP24T 2,4

|            |        |       |    |   |
|------------|--------|-------|----|---|
|            |        |       |    |   |
| 52,900 lbs | 7' 10" | 7' 7" | 4' | ✓ |



## FORK CARRIAGE 59,520 LBS (WITH FORK POSITIONER)

*ATT - 03 - 029 Q-FIT I*

Floating fork carriage with capacity up to 59,520 lbs. Fork width 7' 10", fork length 7' 10". Hydraulic movement of the individual forks possible. Load protection grid included.



**Suitable for  
HTH**

### FCP27T

|            |        |       |        |   |
|------------|--------|-------|--------|---|
|            |        |       |        |   |
| 59,520 lbs | 7' 10" | 4' 8" | 7' 10" | ✓ |



## FORK CARRIAGE 66,140 LBS (WITH FORK POSITIONER)

ATT - 03 - 030 Q-FIT I

Floating fork carriage with capacity up to 66,140 lbs. Fork width 2,500 mm, fork length 2,400 mm. Hydraulic movement of the individual forks possible. Load protection grid included.

**Suitable for  
HTH**

### FCP30T

|            |        |           |           |   |
|------------|--------|-----------|-----------|---|
|            |        |           |           |   |
| 66,140 lbs | 7' 10" | min 4' 5" | max 6' 6" | ✓ |



## FORK CARRIAGE 66,140 LBS (WITH FORK POSITIONER AND SIDESHIFT)

ATT - 03 - 031 Q-FIT I

Lowered fork carriage with capacity up to 66,140 lbs, with hydraulic movement of the individual forks and combined side shift possible. Thinner forks and without load protection and support grille.

**Suitable for  
HTH**

### FCPT30T 2,4 R


|            |        |           |           |            |   |
|------------|--------|-----------|-----------|------------|---|
|            |        |           |           | SIDE SHIFT |   |
| 66,140 lbs | 7' 10" | min 2' 8" | max 8' 8" | +/- 11"    | ✓ |



## EXTENDABLE 66,140 LBS FORK CARRIAGE WITH POSITIONER

ATT - 03 - 032 Q-FIT I

Lowered fork carriage with capacity up to 66,140 lbs, with hydraulic movement of the individual forks possible.

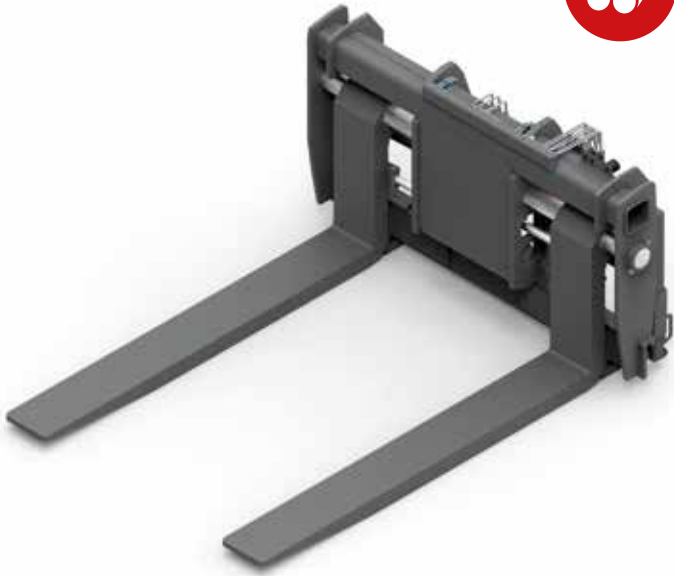

**Suitable for  
HTH**

### FCEP30T 2,4 R

|            |        |       |           |   |
|------------|--------|-------|-----------|---|
|            |        |       |           |   |
| 66,140 lbs | 7' 10" | 4' 5" | max 8' 2" | ✓ |



## FORK CARRIAGE 77,160 LBS (WITH POSITIONER)

ATT - 03 - 033 Q-FIT I

Fork carriage with capacity up to 77,160 lbs, with hydraulic movement of the individual forks possible.



**Suitable for  
HTH**

### FCP35T

|            |        |           |           |   |
|------------|--------|-----------|-----------|---|
|            |        |           |           |   |
| 77,160 lbs | 7' 10" | min 4' 7" | max 6' 8" | ✓ |



## FORK CARRIAGE 110,230 LBS (WITH POSITIONER)

ATT - 03 - 037 Q-FIT I

Fork carriage with capacity up to 110,230 lbs, with hydraulic movement of the individual forks. Load protection grid included.



**Suitable for**  
**HTH**

**FCP50T**

|             |        |       |       |   |
|-------------|--------|-------|-------|---|
|             |        |       |       |   |
| 110,230 lbs | 7' 10" | 4' 7" | 6' 8" | ✓ |



## ROTATING 11,020 LBS FORK CARRIAGE

ATT - 03 - 041 Q-FIT I

Retracting rotating forks which allow complete 360° rotation up to 3m height. Upward rotation is automatically limited to +/-90° depending on working conditions. These forks can be equipped with a rotation block which can limit the rotation to +/- 90° depending on working requirements. These forks can lift and move all kinds of materials up to a maximum of 11,020 lbs.

Frontal load capacity:  
 TH = 7,000 lbs  
 RTH 5.18 - RTH 7.26 = 8,000 lbs  
 RTH 8.26 - RTH 13.26 = 11,020 lbs  
 Rotated load capacity = 5,500 lbs

**Suitable for**  
**RTH - TH**

**RFC 2,5**

|            |        |       |         |   |
|------------|--------|-------|---------|---|
|            |        |       |         |   |
| 11,020 lbs | 3' 11" | 3' 8" | +/- 90° | ✓ |



[www.magnith.com](http://www.magnith.com)